


Under tree irrigation Low discharge

FEATURES

- √ 1/2" male threaded inlet
- √ Trajectory angle : 7° or 16°
- √ Front nozzle from Ø1.5 to 2.5 mm
- √ Discharge from 0.12 to 0.39 m³/h
- √ Radius from 5.8 to 9.0 meters
- √ Working pressure : 2.5 to 3.5 bars
- √ Full circle

Nozzle diameter (mm)	Pressure (bar)	Discharge* (l/h)	Radius (m)	
			Nozzle 7°	Nozzle 16°
1.5	2.5	118	5.8	-
	3.0	130	6.0	-
	3.5	138	6.1	-
2.0	2.5	220	6.3	8.6
	3.0	232	6.4	8.8
	3.5	248	6.5	8.9
2.5	2.5	326	6.6	8.7
	3.0	358	6.7	9.0
	3.5	386	6.8	9.0

* To be used for informational purpose only.

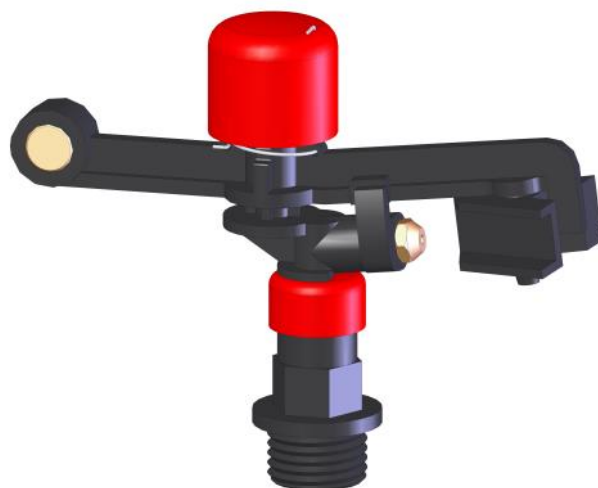

USE

- Under tree irrigation.
- For orchards.

SPECIALITIES

- Impact sprinkler.
- Large choice of nozzles (7°, 16°, standard or key).
- Can be used with simplified filtration system.
- Brass nozzle.
- Easy to use.

HOW TO FIT

- Put Teflon on the sprinkler base (do not put it on springs)
- Check that the sprinkler base does not touch the inner part of the connector that will block rotation.
- Spacing between sprinkler maxi 12 meters (16°).
- One line spacing 12 meters maximum.
- To install on Stake P6 or P10 or saddle tee.
- Use low density PE pipe or drip pipe with P6 or P10

Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.

