


Under foliage irrigation

FEATURES

- ✓ 1/2" male threaded inlet
- ✓ Trajectory angle : 7° or 16°
- ✓ Front nozzle from Ø2.5 to Ø3.2 mm
- ✓ Discharge from 0.29 to 0.64 m³/h
- ✓ Radius from 6.8 to 9.7 meters
- ✓ Working pressure : 2.5 to 3.5 bars

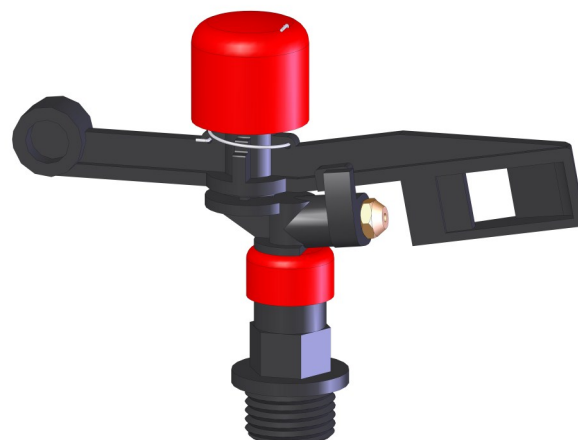


USE

- Under foliage irrigation, orchards.

SPECIALITIES

- Impact sprinkler.
- Low discharge
- One line spacing 12 meters maximum.
- Can be used with simplified filtration system.
- To install on Stake P6 or P10 or saddle tee.
- Easy to use.
- Brass nozzle.

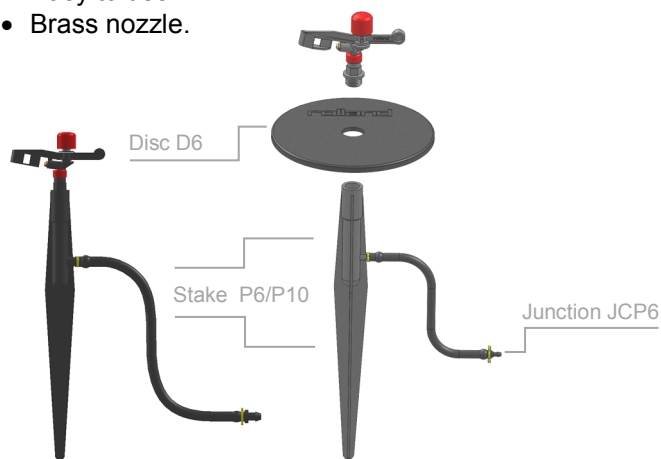

Nozzle diameter (mm)	Pressure (bar)	Discharge* (l/h)	Radius (m) Nozzle 7°	Radius(m) Nozzle 16°
2.0	2.0	190	6.4	7.8
	2.5	220	6.6	8.0
	3.0	232	7.0	8.4
2.5	2.0	290	6.8	7.8
	2.5	326	7.6	8.3
	3.0	358	8.0	9.0
2.8	2.5	396	Not recommended.	8.5
	3.0	406		9.0
	3.5	415		9.3
3.0	2.5	420	Not recommended.	8.7
	3.0	426		9.1
	3.5	475		9.4
3.2	2.5	498	Not recommended.	9.0
	3.0	560		9.4
	3.5	640		9.7

* To be used for informational purpose only.

HOW TO FIT

- Put Teflon on the sprinkler base (do not put it on springs).
- Check that the sprinkler base does not touch the inner part of the connector that will block rotation.

Installations and specifications done in the area are made under the responsibility of the installer according to the area Rules and Authorities.

