

FEATURES


- ✓ 1" female threaded inlet
- ✓ Trajectory angle: 30°
- ✓ Nozzle from Ø3.5 to 4.5 mm
- ✓ Full circle or part circle (E11S)
- ✓ Discharge from 0.66 to 1.48 m³/h
- ✓ Radius from 11 to 13.0 meters
- ✓ Working pressure : 3.0 to 4.5 bars

USE

- Pop up impact sprinkler for landscape applications.
- Landscapes, private gardens, horse racing, sports-fields, golf courses.

SPECIALITIES

- ABS casing
- Brass sprinkler and nozzle inside.
- Screw nozzle to adjust droplets size and radius.
- No maintenance required.
- Can be easily repaired. All spare parts can be ordered.

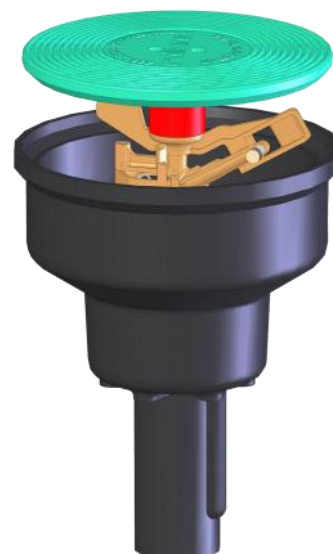

E11 (full circle)

Nozzle size (mm)	Pressure (bar)	Discharge* (l/h)	Radius* (m)
3.5	2.0	660	11.50
	3.0	790	11.90
	4.0	950	12.60
4.0	2.5	870	11.00
	3.0	1040	11.50
	3.5	1210	12.30
4.5	2.5	1190	11.50
	3.0	1310	12.20
	3.5	1480	13.00

Also existing with front nozzle : Ø3.7 - 3.8 - 4.2 - 5.0
Rear nozzle : Ø2.0 - 2.5

* To be used for informational purposes only.

E11S (part circle)

Nozzle size (mm)	Pressure (bar)	Discharge* (l/h)	Radius* (m)
4.0	2.0	870	11.00
	3.0	1040	11.50
	4.0	1210	12.30
4.5	2.0	1190	11.50
	3.0	1310	12.20
	4.0	1480	13.00

* To be used for informational purposes only.

