

Pop up sprinklers

FEATURES

- ✓ 1" female threaded inlet
- ✓ Trajectory angle: 28°
- ✓ Nozzle from Ø4.5 to 7.5 mm
- ✓ Discharge from 1.6 to 6.7 m³/h
- ✓ Radius from 13 to 20.0 meters
- ✓ Working pressure : 3.0 to 5.0 bars


- ✓ **E21D** : two opposite nozzles
- ✓ **E21S** : part circle, one nozzle
- ✓ **E21C** : full circle, one nozzle.

USE

- Pop up impact sprinkler for landscape applications.
- Landscapes, private gardens, horse racing, sports fields, golf courses.

SPECIALITIES

- ABS casing
- Brass sprinkler and nozzle inside.
- Screw nozzle to adjust droplets size and radius.
- No maintenance required.
- Can be easily repaired. All spare parts can be ordered.

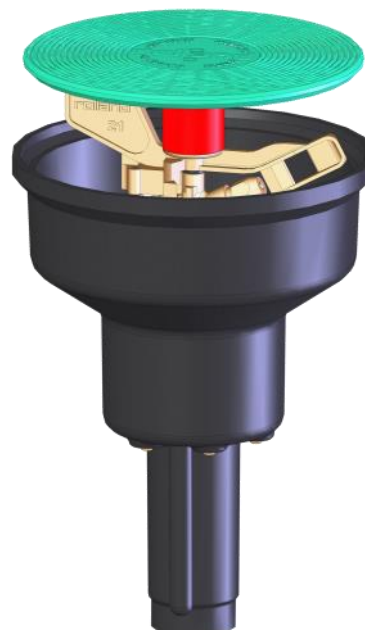

E21D (Two nozzles)

Nozzle size (mm)	Pressure (bar)	Discharge (l/h)	Radius (m)
4.5 x 5.0	3.0	2930	15.00
	4.0	3400	16.00
4.5 x 5.5	3.0	3240	15.00
	4.0	3670	16.30
4.5 x 6.0	3.0	3570	16.50
	4.0	4140	17.50
4.5 x 6.5	3.0	3880	16.80
	4.0	4270	17.20
5.0 x 7.0	3.0	4540	17.30
	4.0	5390	18.50
5.0 x 7.5	4.0	5690	19.00
	5.0	6700	20.00

Also exist with front nozzle : Ø4.8 / 5.5 / 5.8 / 6.0

* To be used for informational purposes only.

E21 (one nozzle) / E21S

Nozzle size (mm)	Pressure (bar)	Discharge (l/h)	Radius (m)
5.5	2.0	1610	13.00
	3.0	1970	14.00
	4.0	2180	15.00
6.0	2.0	2140	14.00
	3.0	2300	15.80
	4.0	2650	16.10
6.5	3.0	2610	16.50
	4.0	2780	17.00
	5.0	3200	17.50
7.0	3.0	2880	17.00
	4.0	3480	17.50
	5.0	3960	18.00

* To be used for informational purposes only.